

F1429MB

100Ω DIFF-In – 50Ω SE-Out Amplifier 3.0GHz to 4.2GHz

The F1429MB is a differential input / single-ended output 3.0GHz to 4.2GHz high-gain RF amplifier. The combination of impedance translation, high gain, high linearity, and low noise performance makes this device an ideal first-stage amplifier for a variety of transmitter applications.

The F1429MB is optimized to operate with a single 5V power supply and a nominal 73mA of I_{CC} . When operated at 3.55GHz, the device provides 21dB typical gain with 1.8dB noise figure, +40dBm OIP3, and +21dBm OP1dB.

The F1429MB is pin-compatible with Axiro' F1429xx family of RF amplifiers (shown below). Each F1429 variant is packaged in a 2×2 mm, 12-VFQFPN, with a 100Ω differential RF input and 50Ω single-ended RF output impedances for ease of integration into the signal path.

F1429xx Base Part Number	Differential Input Impedance	DC Feed	Frequency Band	Frequency Coverage
F1429LB	100Ω	No	Low	1.4GHz to 3.2GHz
F1429MB	100Ω	No	Mid	3.0GHz to 4.2GHz
F1429HB	100Ω	No	High	4.0GHz to 6.0GHz

Competitive Advantage

- High Gain and Excellent Gain Flatness Over Frequency
- Standby (STBY) Feature
- Differential Input to Directly Interface with Transceiver Outputs

Applications


- 5G Massive MIMO Base Stations
- 4G TDD and FDD Base Stations
- Repeaters and DAS
- Point to Point Infrastructure

Features

- RF range: 3.0GHz to 4.2GHz
- Gain = 21dB at 3.55GHz
- Noise figure = 1.8dB at 3.55GHz
- OIP3 = +40dBm at 3.55GHz
- Output P1dB = +21dBm at 3.55GHz
- Gain variation over temperature = ± 0.2 typical
- 100Ω differential input impedance
- 50Ω single-ended output impedance
- 3.3V or 5V power supply
- I_{CC} = 73mA at 5V
- 1.3mA standby current
- 1.8V and 3.3V logic support for STBY control
- Operating temperature (T_{EP}) range: -40°C to $+115^{\circ}\text{C}$
- 2×2 mm 12-VFQFPN package

Block Diagram

Figure 1. F1429MB Block Diagram

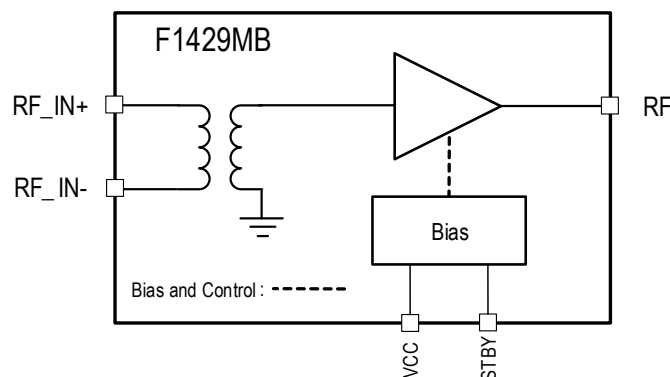

Contents

Pin Information	4
Pin Assignments.....	4
Pin Descriptions.....	4
Specifications	5
Absolute Maximum Ratings.....	5
Recommended Operating Conditions	5
Electrical Characteristics - 5V Supply.....	6
Electrical Characteristics - 3.3V Supply.....	8
Thermal Characteristics.....	10
Typical Operating Conditions (TOC)	10
Typical 5V Performance Characteristics.....	11
Typical 3.3V Performance Characteristics.....	13
Evaluation Kit Picture	15
Evaluation Kit Circuit	16
Application Information.....	17
Power Supplies.....	17
Package Outline Drawings	18
Marking Diagram	18
Ordering Information.....	18
Revision History.....	18

List of Figures

Figure 1. F1429MB Block Diagram.....	1
Figure 2. Pin Assignments for $2 \times 2 \times 0.75$ mm 12-VFQFPN Package – Top View	4
Figure 3. Gain.....	11
Figure 4. Reverse Isolation.....	11
Figure 5. Input Return Loss	11
Figure 6. Output Return Loss	11
Figure 7. Output IP3	11
Figure 8. Output P1dB.....	11
Figure 9. Noise Figure.....	12
Figure 10. Amplitude Imbalance	12
Figure 11. Phase Imbalance.....	12
Figure 12. CMR	12
Figure 13. Gain.....	13
Figure 14. Reverse Isolation.....	13
Figure 15. Input Return Loss	13

Figure 16. Output Return Loss13

Figure 17. Output IP313

Figure 18. Output P1dB.....13

Figure 19. Noise Figure14

Figure 20. Amplitude Imbalance14

Figure 21. Phase Imbalance.....14

Figure 22. CMR14

Figure 23. Evaluation Kit – Top View.....15

Figure 24. Evaluation Kit – Bottom View15

Figure 25. Evaluation Kit Electrical Schematic16

Figure 26. Control Pin Interface for Signal Integrity17

List of Tables

Table 1. Pin Descriptions.....4

Table 2. Absolute Maximum Ratings5

Table 3. Recommended Operating Conditions5

Table 4. Electrical Characteristics with a 5V Supply.....6

Table 5. Electrical Characteristics with a 3.3V Supply.....8


Table 6. Thermal Characteristics.....10

Table 7. Evaluation Kit Bill of Material (BOM)16

Pin Information

Pin Assignments

Figure 2. Pin Assignments for 2 × 2 × 0.75 mm 12-VFQFPN Package – Top View

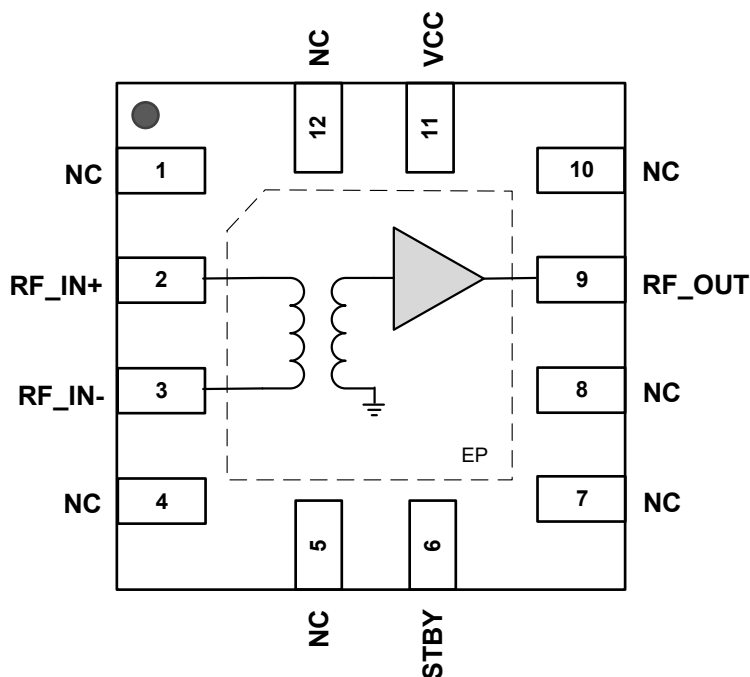

Pin Descriptions

Table 1. Pin Descriptions

Number	Name	Description
1, 4, 5, 7, 8, 10, 12	NC	No internal connection. It is highly recommended that these pins be connected to a ground via that is located as close to each pin as possible.
2	RF_IN+	Differential RF input +. Internally tied to ground. Recommendation: Use an external DC block to prevent shorting of any DC voltage that may be present on the preceding RF stage.
3	RF_IN-	Differential RF input -. Internally tied to ground. Recommendation: Use an external DC block to prevent shorting of any DC voltage that may be present on the preceding RF stage.
6	STBY	Standby. If this pin is not connected or is logic LOW, the F1429MB will operate under its normal operating condition. Apply a logic HIGH for STBY.
9	RF_OUT	Single-ended RF output. An external DC block is required.
11	VCC	Connect to the supply voltage via a choke. An external bypass capacitor must be placed as close to the pin as possible.
	– EPAD	Exposed paddle. Internally connected to ground. Solder this exposed paddle to a printed circuit board (PCB) pad that uses multiple ground vias to provide heat transfer out of the F1429MB into the PCB ground planes. These multiple ground vias are also required to achieve the specified RF performance.

Specifications

Absolute Maximum Ratings

The absolute maximum ratings are stress ratings only. Stresses greater than those listed below can cause permanent damage to the device. Functional operation of the F1429MB at absolute maximum ratings is not implied. Exposure to absolute maximum rating conditions might affect device reliability.

Table 2. Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Unit
VCC to GND	V _{CC}	-0.3	+5.5	V
STBY	V _{STBY}	-0.3	Lower of (5V, V _{CC} + 0.25V)	V
RF Input Power Applied for 24 Hours Maximum (V _{CC} applied, f = 3.55GHz, T _{EP} = +115°C, and input/output VSWR = 1:1 based on a 100Ω system) ^[b]	P _{MAX24}	-	+20	dBm
Storage Temperature Range	T _{STOR}	-65	+150	°C
Lead Temperature (soldering, 10s)	T _{LEAD}	-	+260	°C
Electrostatic Discharge – Human Body Model (HBM) (JEDEC/ESDA JS-001-2012)	V _{ESDHBM}	-	1000	V
Electrostatic Discharge – Charge Device Model (CDM) (JEDEC 22-C101F)	V _{ESDCDM}	-	1500	V

[a] Exposure to these maximum RF levels can result in significant V_{CC} current draw due to overdriving the amplifier stages.

[b] Tested using an external 2:1 transformer at the RF input.

Recommended Operating Conditions

Table 3. Recommended Operating Conditions

Parameter	Symbol	Condition	Minimum	Typical	Maximum	Unit
Power Supply Voltage ^[a]	V _{CC}	V _{CC} pins	4.75	-	5.25	V
Operating Temperature Range	T _{EP}	Exposed paddle temperature	-40	-	+115	°C
Junction Temperature	T _{JMAX}		-	-	150	°C
RF Frequency Range ^[b]	f _{RF}		3.0	-	4.2	GHz
RF_IN Source Impedance	Z _{RF_IN}	Differential	-	100	-	Ω
RF_OUT Load Impedance	Z _{RF_OUT}	Single-ended	-	50	-	Ω

[a] Although the device will operate with a minimum supply voltage of 3.15V, the performance of the device has been optimized to operate within a supply voltage range of 4.75V to 5.25V.

[b] To optimize RF performance, different matching components can be used as described in the BOM.

Electrical Characteristics - 5V Supply

See the F1429MB application circuit. Specifications apply when operated at $V_{CC} = +5.0V$, $f_{RF} = 3.55GHz$, $T_{EP} = +25^{\circ}C$, STBY = logic LOW, $Z_S = 100\Omega$ differential, $Z_L = 50\Omega$ single-ended, and EVKit traces and connectors are de-embedded, unless otherwise stated.

Table 4. Electrical Characteristics with a 5V Supply

Note: See important table notes at the end of the table.

Parameter	Symbol	Condition	Minimum	Typical	Maximum	Unit
Logic Input HIGH Threshold	V_{IH}		1.17 ^[a]	-	-	V
Logic Input LOW Threshold	V_{IL}		-	-	0.63	V
Logic Current	I_{IH}, I_{IL}	STBY pin using 1.8V logic	-3	-	+70	μA
Supply Current	I_{CC}		-	73	86	mA
Standby Current	I_{CC_STBY}		-	1.3	-	mA
Settling Time	t_{SETTLE}	From 50% STBY control to within $\pm 0.5dB$ of final gain	-	400	-	ns
RF Input Return Loss	RL_{IN}	$f_{RF} = 3.0GHz$	-	11	-	dB
		$f_{RF} = 3.3GHz$	-	20	-	
		$f_{RF} = 3.55GHz$	-	30	-	
		$f_{RF} = 3.8GHz$	-	30	-	
		$f_{RF} = 4.2GHz$	-	27	-	
RF Output Return Loss	RL_{OUT}	$f_{RF} = 3.0GHz$	-	8	-	dB
		$f_{RF} = 3.3GHz$	-	12	-	
		$f_{RF} = 3.55GHz$	-	15	-	
		$f_{RF} = 3.8GHz$	-	13	-	
		$f_{RF} = 4.2GHz$	-	10	-	
Gain	G	$f_{RF} = 3.0GHz$	-	20	-	dB
		$f_{RF} = 3.3GHz$	-	20.5	-	
		$f_{RF} = 3.55GHz$	18	21	-	
		$f_{RF} = 3.8GHz$	-	20	-	
		$f_{RF} = 4.2GHz$	-	19.5	-	
Gain Flatness (amplitude)	G_{VAR}	$f_{RF} = 3.1GHz, \pm 100MHz$	-	0.3	-	dB
		$f_{RF} = 3.3GHz, \pm 100MHz$	-	0.1	-	
		$f_{RF} = 3.55GHz, \pm 100MHz$	-	0.2	-	
		$f_{RF} = 3.8GHz, \pm 100MHz$	-	0.3	-	
		$f_{RF} = 4.1GHz, \pm 100MHz$	-	0.4	-	
Gain Variation over Temperature	G_{TEMP}	$T_{EP} = -40^{\circ}C$ to $+115^{\circ}C$	-	± 0.2	-	dB
Reverse Isolation	REV_{ISO}		-	32	-	dB

Parameter	Symbol	Condition	Minimum	Typical	Maximum	Unit
Amplitude Imbalance	IMBAL _{AMP}	Measures RF_IN- to RF_OUT and compares RF_IN+ to RF_OUT amplitude	-	0.4	-	dB
Phase Imbalance	IMBAL _{PH}	Measures RF_IN- to RF_OUT and compares RF_IN+ to RF_OUT phase. Deviation is from ideal 180 degrees.	-	0.9	-	deg
Common Mode Rejection	CMR		-	31.5	-	dB
Noise Figure	NF	f _{RF} = 3.0GHz	-	1.6	-	dB
		f _{RF} = 3.3GHz	-	1.9	-	
		f _{RF} = 3.55GHz	-	1.8	2	
		f _{RF} = 3.8GHz	-	1.6	-	
		f _{RF} = 4.2GHz	-	1.8	-	
Noise Figure Variation over Temperature	NF _{TEMP}	T _{EP} = -40°C to +115°C	-	±0.65	-	dB
Output Third-Order Intercept Point ^[b]	OIP3	f _{RF} = 3.0GHz	-	38	-	dBm
		f _{RF} = 3.3GHz	-	37	-	
		f _{RF} = 3.55GHz	T _{EP} = 25°C	-	-	
			T _{EP} = -40°C to +115°C	32	-	
		f _{RF} = 3.8GHz	-	37	-	
		f _{RF} = 4.2GHz	-	37	-	
Output P1dB	OP1dB	f _{RF} = 3.0GHz	-	21	-	dBm
		f _{RF} = 3.3GHz	-	21	-	
		f _{RF} = 3.55GHz	18	21	-	
		f _{RF} = 3.8GHz	-	20	-	
		f _{RF} = 4.2GHz	-	20	-	
2 nd Order Harmonic Distortion ^[c]	HD2		-	-34	-	dBc
3 rd Order Harmonic Distortion ^[c]	HD3		-	-46	-	dBc

[a] Specifications in the minimum/maximum columns that are shown in ***bold italics*** are guaranteed by test. Specifications in these columns that are not shown in bold italics are guaranteed by design characterization.

[b] OIP3 test conditions: Tone spacing = 5MHz, P_{OUT} = +0dBm/tone.

[c] Harmonic Distortion test conditions: P_{OUT} = +0dBm/tone.

Electrical Characteristics - 3.3V Supply

See the F1429MB application circuit. Specifications apply when operated at $V_{CC} = +3.3V$, $f_{RF} = 3.55GHz$, $T_{EP} = +25^{\circ}C$, STBY = logic LOW, $Z_S = 100\Omega$ differential, $Z_L = 50\Omega$ single-ended, and EVKit traces and connectors are de-embedded, unless otherwise stated.

Table 5. Electrical Characteristics with a 3.3V Supply

Note: See important table notes at the end of the table.

Parameter	Symbol	Condition	Minimum	Typical	Maximum	Unit
Logic Input High Threshold	V_{IH}		1.17 ^[a]	-	-	V
Logic Input Low Threshold	V_{IL}		-	-	0.63	V
Logic Current	I_{IH}, I_{IL}	STBY pin using 1.8V logic	-3	-	+70	μA
Supply Current	I_{CC}		-	30	-	mA
Standby Current	I_{CC_STBY}		-	1.5	-	mA
RF Input Return Loss	RL_{IN}	$f_{RF} = 3.0GHz$	-	9	-	dB
		$f_{RF} = 3.3GHz$	-	17	-	
		$f_{RF} = 3.55GHz$	-	21	-	
		$f_{RF} = 3.8GHz$	-	19	-	
		$f_{RF} = 4.2GHz$	-	16	-	
RF Output Return Loss	RL_{OUT}	$f_{RF} = 3.0GHz$	-	10	-	dB
		$f_{RF} = 3.3GHz$	-	15	-	
		$f_{RF} = 3.55GHz$	-	15	-	
		$f_{RF} = 3.8GHz$	-	12	-	
		$f_{RF} = 4.2GHz$	-	8	-	
Gain	G	$f_{RF} = 3.0GHz$	-	19	-	dB
		$f_{RF} = 3.3GHz$	-	19	-	
		$f_{RF} = 3.55GHz$	-	19	-	
		$f_{RF} = 3.8GHz$	-	18.5	-	
		$f_{RF} = 4.2GHz$	-	17.5	-	
Gain Flatness (amplitude)	G_{VAR}	$f_{RF} = 3.1GHz, \pm 100MHz$	-	0.3	-	dB
		$f_{RF} = 3.3GHz, \pm 100MHz$	-	0.1	-	
		$f_{RF} = 3.55GHz, \pm 100MHz$	-	0.4	-	
		$f_{RF} = 3.8GHz, \pm 100MHz$	-	0.5	-	
		$f_{RF} = 4.1GHz, \pm 100MHz$	-	0.6	-	
Gain Variation over Temperature	G_{TEMP}	$T_{EP} = -40^{\circ}C$ to $+115^{\circ}C$	-	± 0.2	-	dB
Reverse Isolation	REV_{ISO}		-	31	-	dB
Amplitude Imbalance	$IMBAL_{AMP}$	Measures RF_IN- to RF_OUT and compares RF_IN+ to RF_OUT amplitude	-	0.4	-	dB

Parameter	Symbol	Condition	Minimum	Typical	Maximum	Unit
Phase Imbalance	IMBAL _{PH}	Measures RF_IN- to RF_OUT and compares RF_IN+ to RF_OUT phase. Deviation is from ideal 180 degrees	-	0.9	-	deg
Common Mode Rejection	CMR		-	31.5	-	deg
Noise Figure	NF	f _{RF} = 3.0GHz	-	1.7	-	dB
		f _{RF} = 3.3GHz	-	1.9	-	
		f _{RF} = 3.55GHz	-	1.9	-	
		f _{RF} = 3.8GHz	-	1.8	-	
		f _{RF} = 4.2GHz	-	1.9	-	
Noise Figure Variation over Temperature	NF _{TEMP}	T _{EP} = -40°C to +115°C	-	±0.75	-	dB
Output Third-Order Intercept Point ^[b]	OIP3	f _{RF} = 3.0GHz	-	28	-	dBm
		f _{RF} = 3.3GHz	-	29	-	
		f _{RF} = 3.55GHz	-	28	-	
		f _{RF} = 3.8GHz	-	26	-	
		f _{RF} = 4.2GHz	-	25	-	
Output P1dB	OP1dB	f _{RF} = 3.0GHz	-	15.5	-	dBm
		f _{RF} = 3.3GHz	-	15.5	-	
		f _{RF} = 3.55GHz	-	15	-	
		f _{RF} = 3.8GHz	-	15	-	
		f _{RF} = 4.2GHz	-	14	-	

[a] Specifications in the minimum/maximum columns that are shown in bold italics are guaranteed by test. Specifications in these columns that are not shown in bold italics are guaranteed by design characterization.

[b] OIP3 test conditions: Tone spacing = 5MHz, POUT = +0dBm/tone.

Thermal Characteristics

Table 6. Thermal Characteristics

Parameter	Symbol	Value	Unit
Junction-to-Ambient Thermal Resistance.	θ_{JA}	112.57	°C/W
Junction-to-Case Thermal Resistance. (Case is defined as the exposed paddle)	θ_{JC-BOT}	27.6	°C/W
Moisture Sensitivity Rating (Per J-STD-020)		MSL 1	

Typical Operating Conditions (TOC)

Unless otherwise noted, for the TOC graphs on the following pages, the following conditions apply:

- Evaluation kit connector and trace losses are de-embedded
- $V_{CC} = 5.0V$ (plots also taken with $V_{CC} = 3.3V$)
- $T_{EP} = 25^{\circ}C$
- STBY = not connected (internally pulled to logic LOW)
- Small signal parameters measured with $P_{OUT} = 0dBm$
- Two tone tests $P_{OUT} = 0dBm$ /tone with 5MHz tone spacing
- All unused ports properly terminated.
- S-parameters (S11, S21, S12, and S22) measured using a de-embedded Differential Board (EVKit) with $Z_S =$ differential 100 Ω and $Z_L =$ single-ended 50 Ω . The inputs are mathematically combined using an ideal 1:2 (50 Ω :100 Ω) transformer to produce the two port S-parameters.
- OIP3, Output P1dB, and Noise Figure measured using a Transformer Board EVKit with $Z_S = Z_L =$ single-ended 50 Ω .
- Amplitude and phase imbalances measures RF_IN+ to RF_OUT and compares to RF_IN- to RF_OUT.
- The phase imbalance is the deviation from an ideal 180 degrees.

Note: The use of the external transformer T1 is included for simple two-port evaluation purposes. At some frequencies, the external transformer interacts with the on-chip balun affecting the gain and noise figure flatness responses. These interactions have been removed from the noise figure TOCs.

Typical 5V Performance Characteristics

Figure 3. Gain

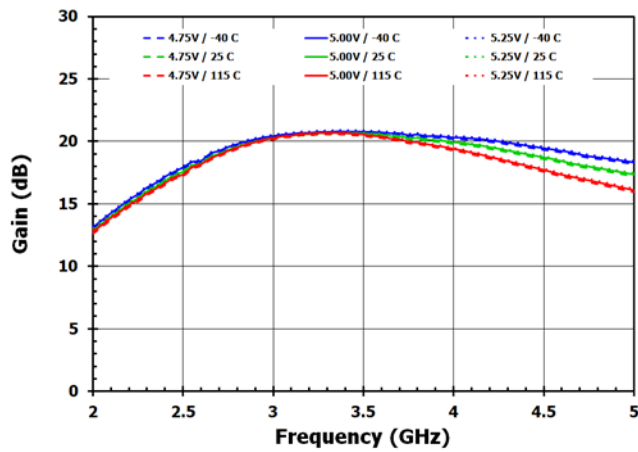


Figure 4. Reverse Isolation

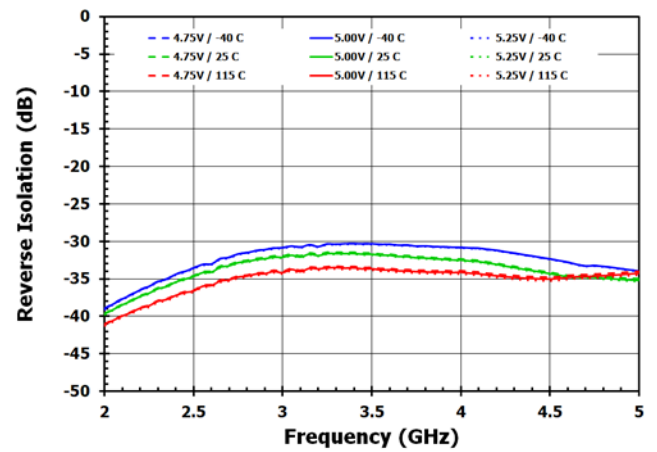


Figure 5. Input Return Loss

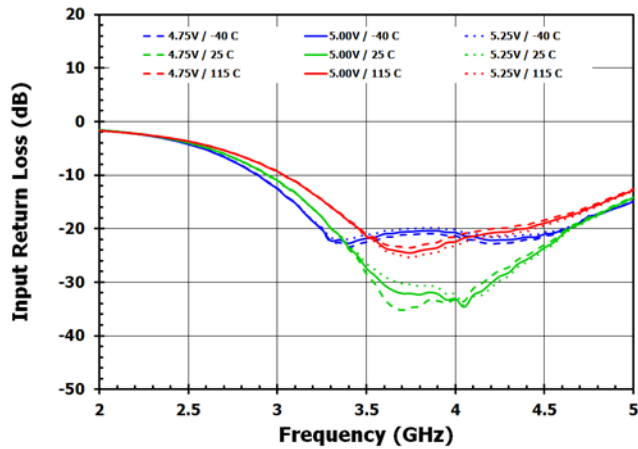


Figure 6. Output Return Loss

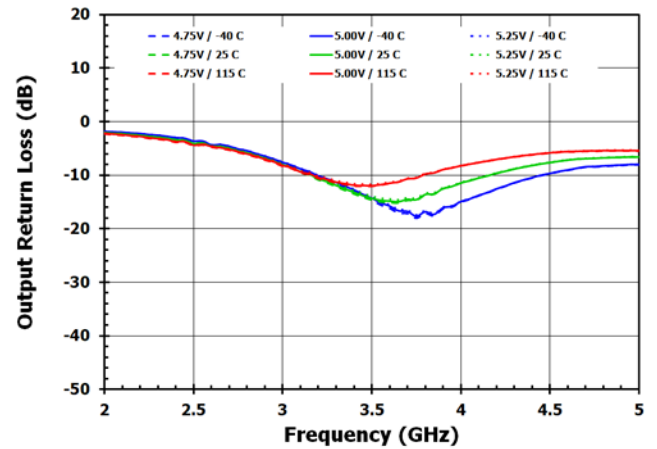


Figure 7. Output IP3

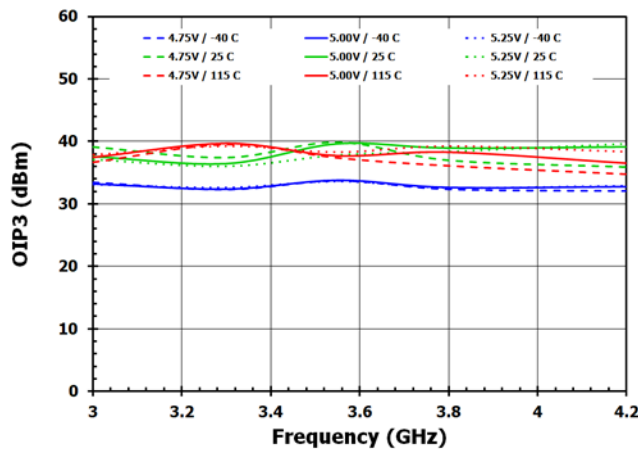


Figure 8. Output P1dB

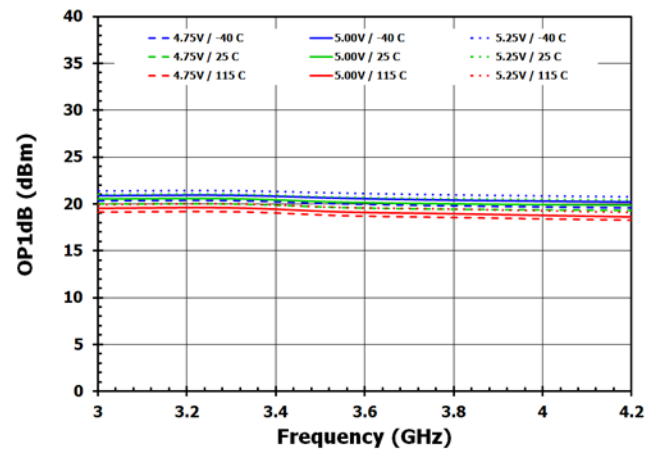


Figure 9. Noise Figure

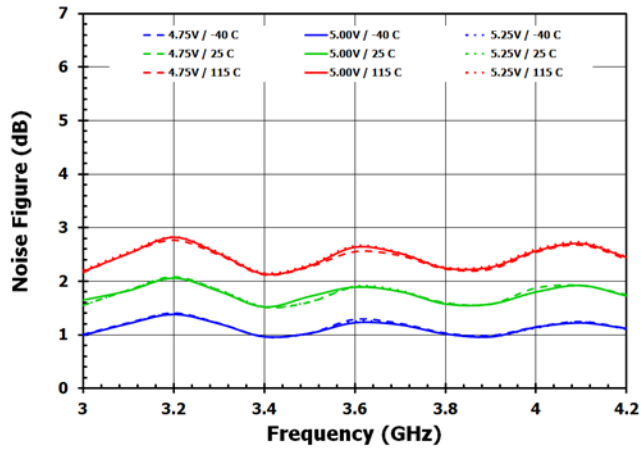


Figure 10. Amplitude Imbalance

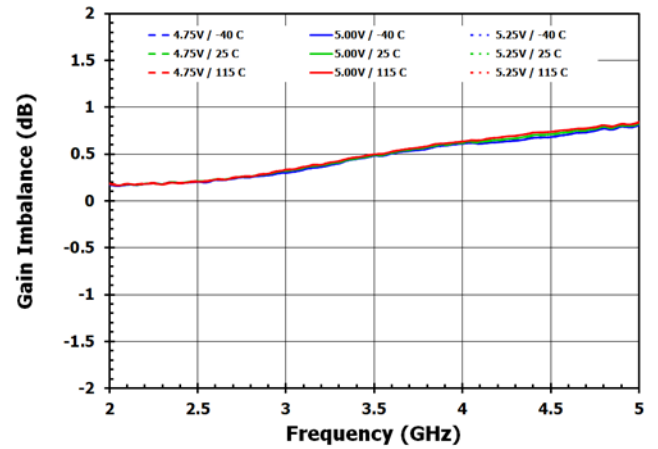


Figure 11. Phase Imbalance


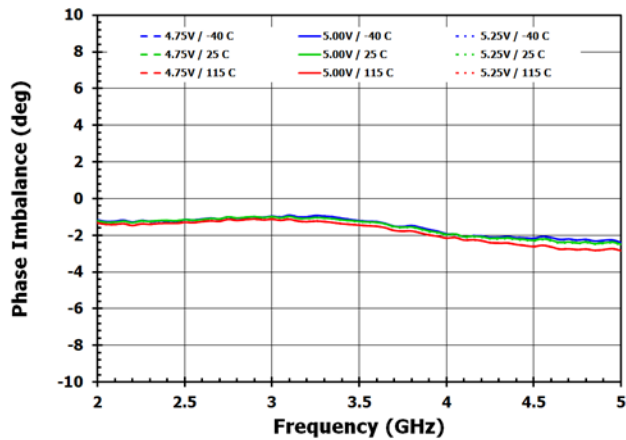


Figure 12. CMR

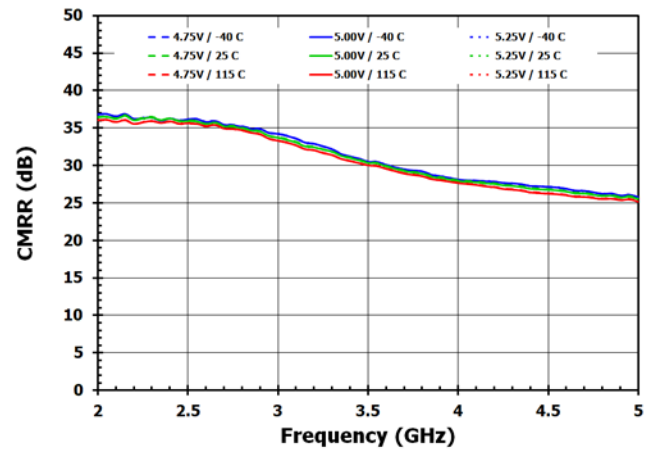

Typical 3.3V Performance Characteristics

Figure 13. Gain

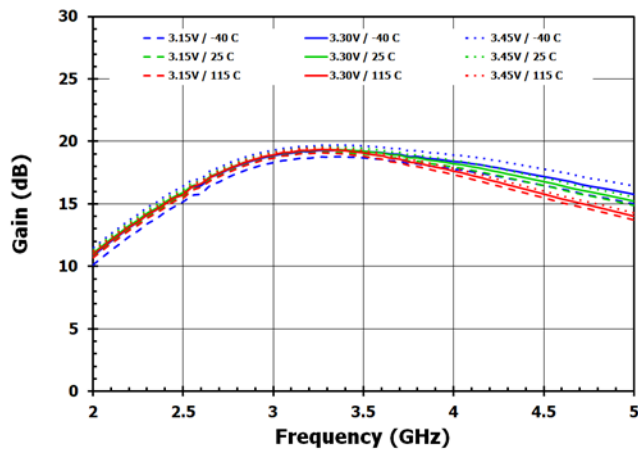


Figure 14. Reverse Isolation

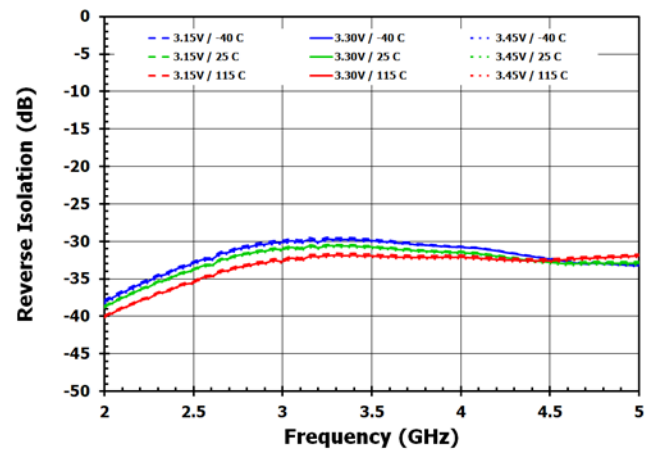


Figure 15. Input Return Loss

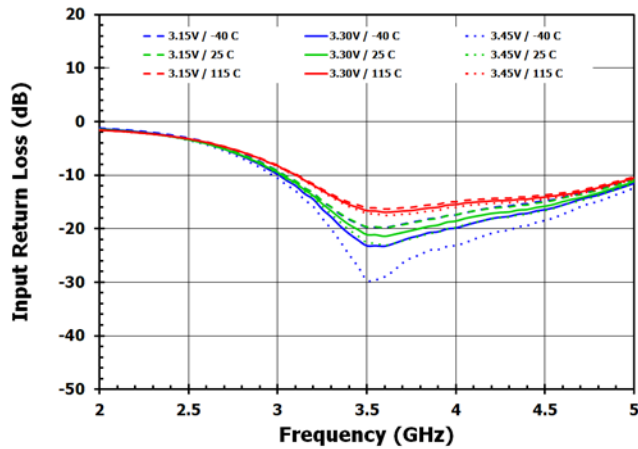


Figure 16. Output Return Loss

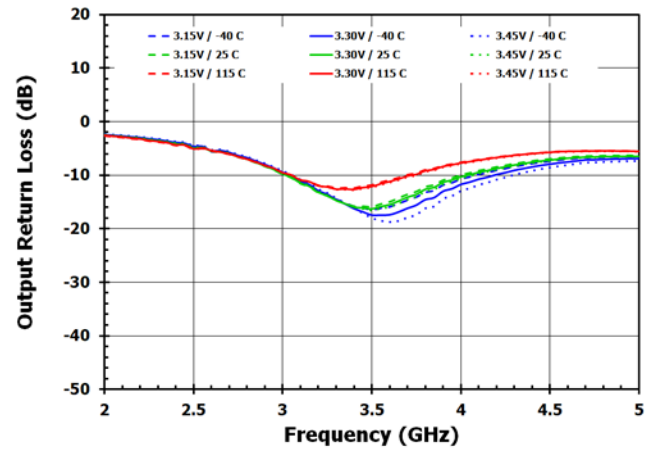


Figure 17. Output IP3

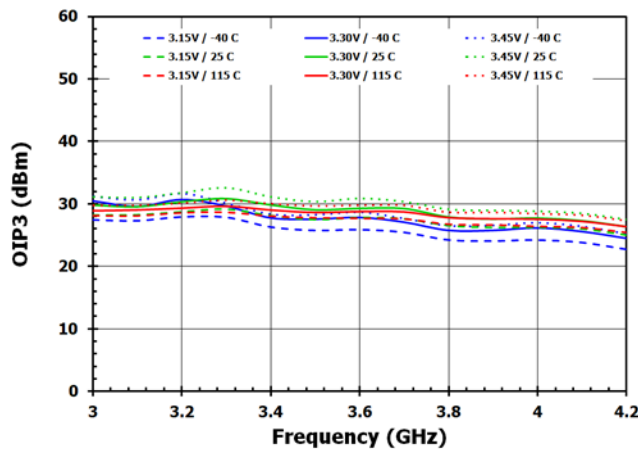


Figure 18. Output P1dB

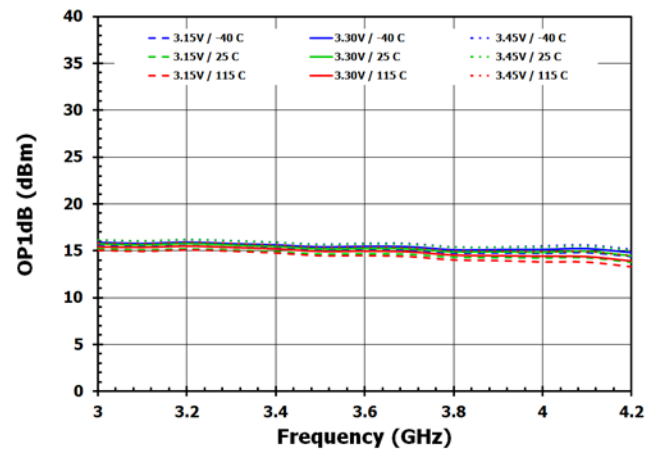


Figure 19. Noise Figure

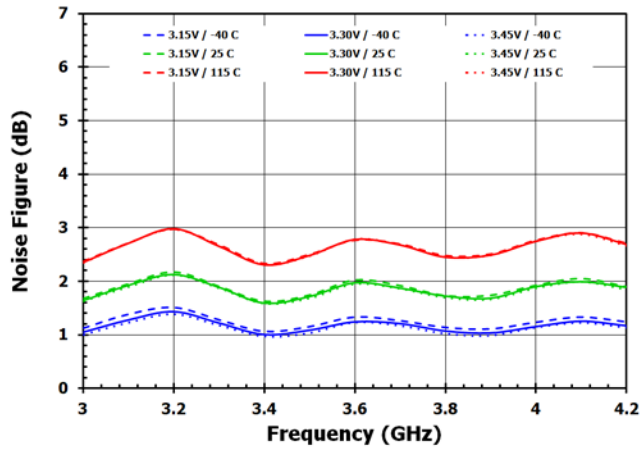


Figure 20. Amplitude Imbalance

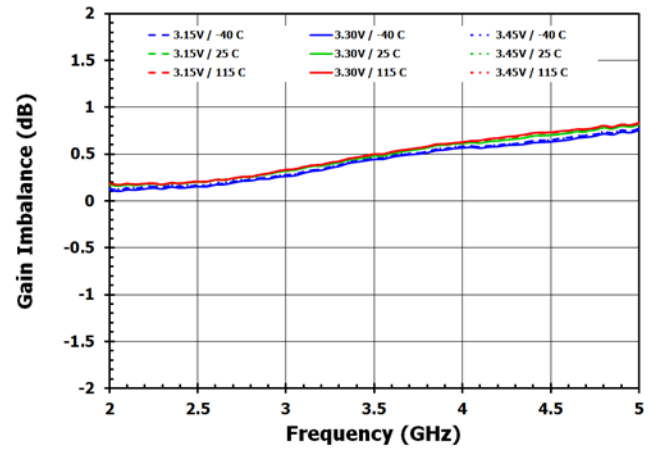


Figure 21. Phase Imbalance


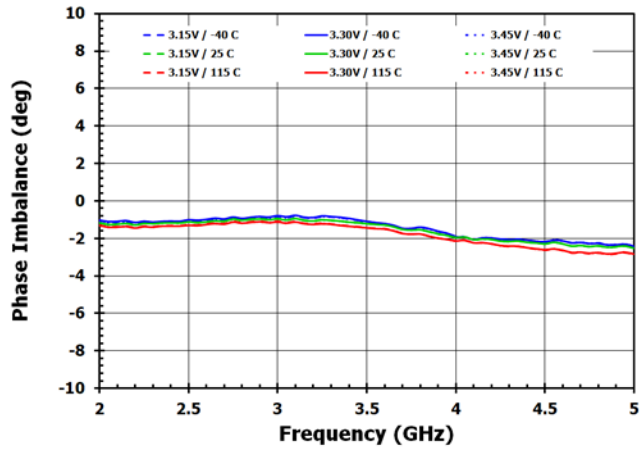


Figure 22. CMR

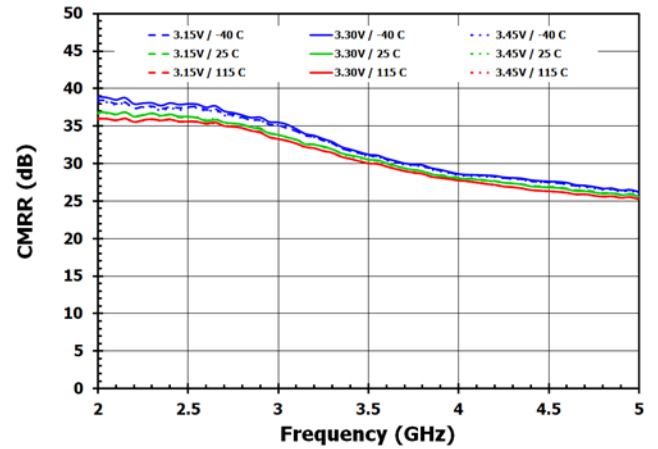

Evaluation Kit Picture

Figure 23. Evaluation Kit – Top View


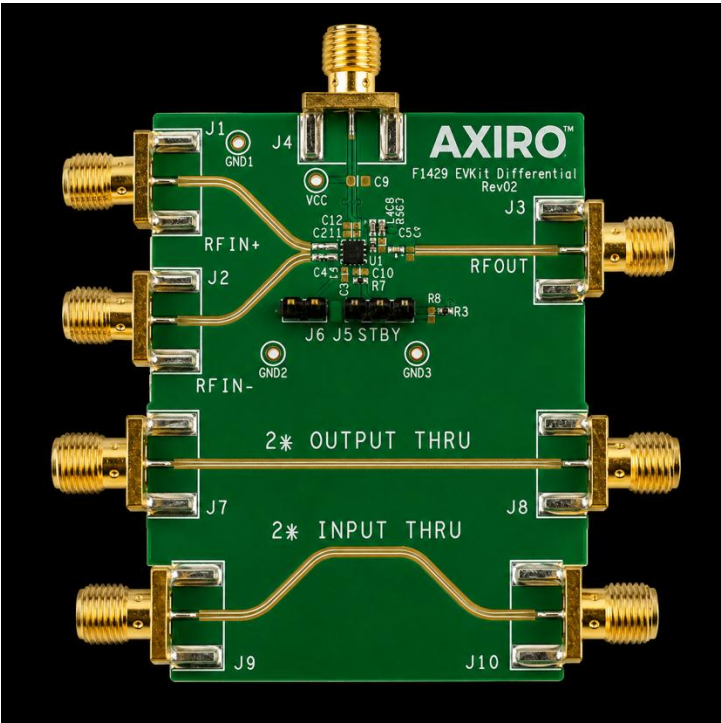


Figure 24. Evaluation Kit – Bottom View

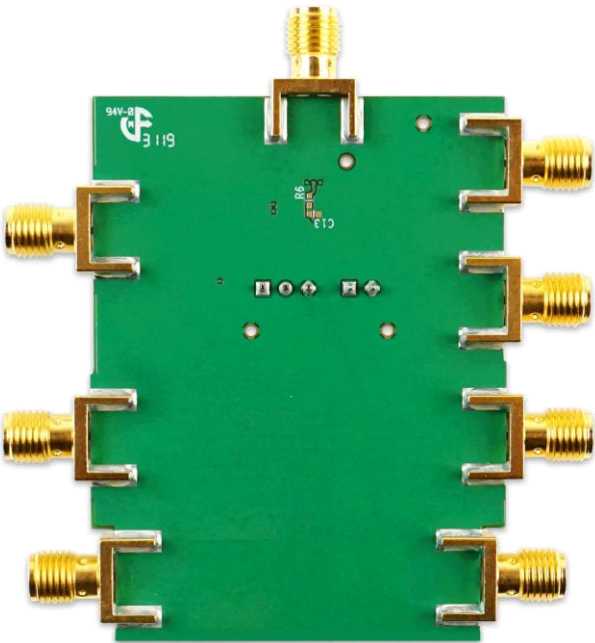

Evaluation Kit Circuit

Figure 25. Evaluation Kit Electrical Schematic

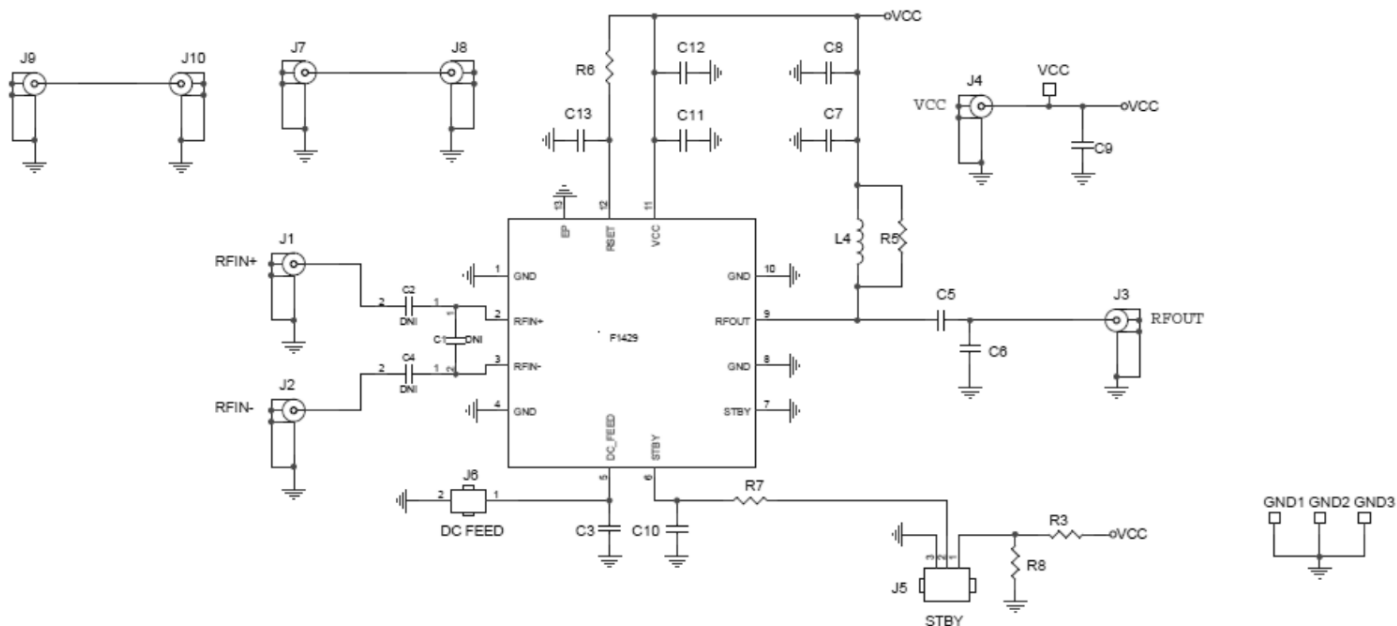


Table 7. Evaluation Kit Bill of Material (BOM)

Part Reference	QTY	Description	Manufacturer Part #	Manufacturer
R7,R3	2	0 ohm Jumper 1/10W (0402)	ERJ2GE0R00X	Panasonic
C8	1	1000pF C0G 50v (0402)	GRM1555C1H102J	Murata
C11	1	Do not Install		
C7	1	100pF C0G 50v (0402)	GRM1555C1H101J	Murata
C2, C4	2	15pF C0G 50v (0402)	GJM1555C1H150J	Murata
C10	1	Do not Install		
L4	1	1.5nH +/-0.3 (0402)	LQG15HS1N5S02	Murata
C5	1	3.3pF COG 50V (0402)	GJM1555C1H3R3B	Murata
J5	1	CONN HEADER VERT 1x3 POS 2.54MM	61300311121	Würth Elektronik
J1,J2, J3, J4, J7, J8, J9, J10	6	SMA Edge Mount	142-0701-851	Cinch Connectivity
C1,C12, C3, C6, C9, R2, R5, R8, J6	0	Do not Install		
U1	1	F1429MB 100Ω DIFF-In — 50Ω SE-Out Amplifier	F1429MBNELI	Axiro
	1	Printed Circuit Board	F1429 EVKIT DIFF Rev.02	Vector Fab


Application Information

Power Supplies

A common VCC power supply should be used for all pins requiring DC power. All supply pins should be bypassed with external capacitors to minimize noise and fast transients. Supply noise can degrade noise figure and fast transients can trigger ESD clamps and cause them to fail. Supply voltage change or transients should have a slew rate smaller than $1\text{V}/20\mu\text{s}$. In addition, all control pins should remain at 0V ($\pm 0.3\text{V}$) while the supply voltage ramps or while it returns to zero.

If control signal integrity is a concern and clean signals cannot be guaranteed due to overshoot, undershoot, ringing, etc., the following circuit at the input of the STBY control pin is recommended. This applies to the STBY pin as shown below. Note the recommended resistor and capacitor values do not necessarily match the EVKit BOM for the case of poor control signal integrity. For multiple devices driven by a single control line, the component values will need to be adjusted accordingly so as not to load down the control line.


Figure 26. Control Pin Interface for Signal Integrity

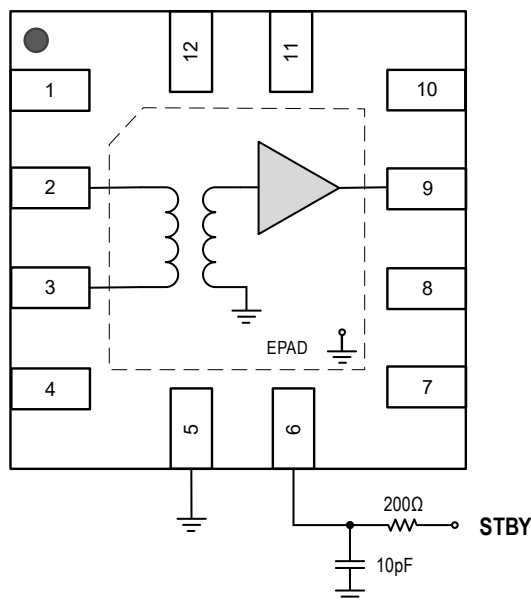

Package Outline Drawings

The package outline drawings are accessible from the Axiro website. The package information is the most current data available and is subject to change without revision of this document.

Marking Diagram

Top Marking Illustration	Marking	Representation
	4D	Two-digit Part Number Identifier
	#	Stepping Indicator
	Y	Last Digit of the Year
	W	Work Week
	**	Lot Sequential Code

Ordering Information

Part Number	Package	MSL Rating	Carrier Type	Temperature
F1429MBNELI	2 × 2 × 0.75 mm 12-VFQFPN	1	Cut Reel	-40° to +115°C
F1429MBNELI8	2 × 2 × 0.75 mm 12-VFQFPN	1	Reel	-40° to +115°C
F1429MBEVB	Evaluation Board			

Revision History

Revision	Date	Description of Change
2.00	Jul 31, 2026	Updated document branding and layout to Axiro Semiconductor standard. No changes to device functionality or specifications.